

Panasonic

SmartArchi
Glareless Down Light

NEW



SmartArchi

Glareless Down Light

Panasonic Corporation Eco Solutions Company
Lighting Equipment Business Unit, Lighting Business Division
■ 1048, Kadoma Osaka 571-8686, Japan
■ Telephone: +81-6-6908-1131

Panasonic®

All Rights Reserved © 2017 COPYRIGHT Panasonic Corporation


The unique optical design enhances beautiful lighting with a suitable light distribution angle.

The compact size and brightness allows for these fixtures to blend in with the ceiling without being noticed.




The image shows down light cut-out $\phi 75$.

Providing a comfortable visual environment with less glare

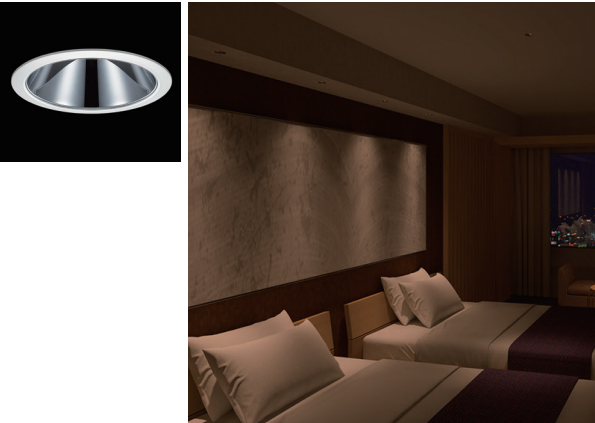


Optional Light Distribution Control available.

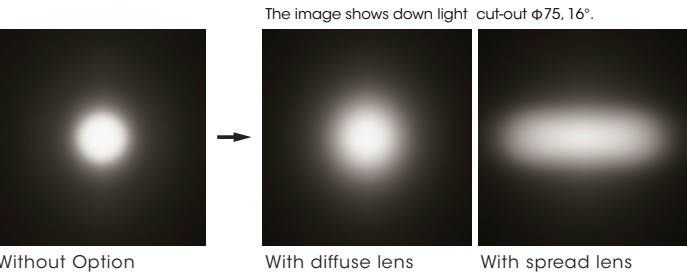

A thinner trim to give an elegant appearance.



Although compact the fixture produces very bright light.


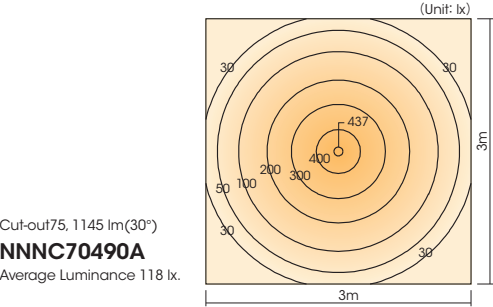


Cut-out $\phi 75$, 1145 lm(30°)
NNNC70490A
Average Luminance 118 lx.

Down Light



Cut-out
 $\phi 55$





8
W
T
Y
P
E

14
W
T
Y
P
E

< 9° >	< 16° >	< 28° >	< 40° >
NNNC70476A 85 lm·7.5W·11.3 lm/W LED(4000K)(CRI85)	NNNC70477A 220 lm·7.5W·29.3 lm/W LED(4000K)(CRI85)	NNNC70478A 450 lm·7.5W·60.0 lm/W LED(4000K)(CRI85)	NNNC70479A 505 lm·7.5W·67.3 lm/W LED(4000K)(CRI85)
NNNC70426A 80 lm·7.5W·10.7 lm/W LED(3000K)(CRI85)	NNNC70427A 210 lm·7.5W·28.0 lm/W LED(3000K)(CRI85)	NNNC70428A 430 lm·7.5W·57.3 lm/W LED(3000K)(CRI85)	NNNC70429A 480 lm·7.5W·64.0 lm/W LED(3000K)(CRI85)
NNNC70480A 125 lm·13.3W·9.4 lm/W LED(4000K)(CRI85)	NNNC70481A 355 lm·13.3W·26.7 lm/W LED(4000K)(CRI85)	NNNC70482A 720 lm·13.3W·54.1 lm/W LED(4000K)(CRI85)	NNNC70483A 795 lm·13.3W·59.8 lm/W LED(4000K)(CRI85)
NNNC70430A 120 lm·13.3W·9.0 lm/W LED(3000K)(CRI85)	NNNC70431A 340 lm·13.3W·25.6 lm/W LED(3000K)(CRI85)	NNNC70432A 690 lm·13.3W·51.9 lm/W LED(3000K)(CRI85)	NNNC70433A 760 lm·13.3W·57.1 lm/W LED(3000K)(CRI85)



Cut-out
 $\phi 75$



14
W
T
Y
P
E

17
W
T
Y
P
E



< 9° >	< 16° >	< 30° >	< 42° >
NNNC70484A 220 lm·13.3W·16.5 lm/W LED(4000K)(CRI85)	NNNC70485A 585 lm·13.3W·44.0 lm/W LED(4000K)(CRI85)	NNNC70486A 975 lm·13.3W·73.3 lm/W LED(4000K)(CRI85)	NNNC70487A 1000 lm·13.3W·75.2 lm/W LED(4000K)(CRI85)
NNNC70434A 210 lm·13.3W·15.8 lm/W LED(3000K)(CRI85)	NNNC70435A 565 lm·13.3W·42.5 lm/W LED(3000K)(CRI85)	NNNC70436A 930 lm·13.3W·69.9 lm/W LED(3000K)(CRI85)	NNNC70437A 955 lm·13.3W·71.8 lm/W LED(3000K)(CRI85)
NNNC70488A 260 lm·16.5W·15.8 lm/W LED(4000K)(CRI85)	NNNC70489A 690 lm·16.5W·41.8 lm/W LED(4000K)(CRI85)	NNNC70490A 1145 lm·16.5W·69.4 lm/W LED(4000K)(CRI85)	NNNC70491A 1180 lm·16.5W·71.5 lm/W LED(4000K)(CRI85)
NNNC70438A 250 lm·16.5W·15.2 lm/W LED(3000K)(CRI85)	NNNC70439A 665 lm·16.5W·40.3 lm/W LED(3000K)(CRI85)	NNNC70440A 1100 lm·16.5W·66.7 lm/W LED(3000K)(CRI85)	NNNC70441A 1125 lm·16.5W·68.2 lm/W LED(3000K)(CRI85)

■Specifications *temporary and subject to change without notice
Glare cut 30°
Reflector: Plastic(Aluminum,Silver Specular Finish)
Trim: Aluminum Die-casting,White Matte Finish
Life time: 40000hr(L70)
2700K and 3500K type are available upon request
Dimming 10-100% with 0-10V dimmer
■Note
More than 230mm height is required when installing the fixture.

Adjustable Down Light



Cut-out
 $\phi 55$



8
W
T
Y
P
E

14
W
T
Y
P
E

< 9° >	< 16° >	< 28° >
NNNC72776A 85 lm·7.4W·11.5 lm/W LED(4000K)(CRI85)	NNNC72777A 220 lm·7.4W·29.7 lm/W LED(4000K)(CRI85)	NNNC72778A 450 lm·7.4W·60.8 lm/W LED(4000K)(CRI85)
NNNC72726A 80 lm·7.4W·10.8 lm/W LED(3000K)(CRI85)	NNNC72727A 210 lm·7.4W·28.4 lm/W LED(3000K)(CRI85)	NNNC72728A 430 lm·7.4W·58.1 lm/W LED(3000K)(CRI85)
NNNC72779A 125 lm·13.3W·9.4 lm/W LED(4000K)(CRI85)	NNNC72780A 355 lm·13.3W·26.7 lm/W LED(4000K)(CRI85)	NNNC72781A 720 lm·13.3W·54.1 lm/W LED(4000K)(CRI85)
NNNC72729A 120 lm·13.3W·9.0 lm/W LED(3000K)(CRI85)	NNNC72730A 340 lm·13.3W·25.6 lm/W LED(3000K)(CRI85)	NNNC72731A 690 lm·13.3W·51.9 lm/W LED(3000K)(CRI85)



Adjustable range of
25 degrees

Optional lens
for $\phi 55$ & $\phi 75$



Spread lens
NYY90002



Applicable only for
beam angle 9°&16°

■Specifications *temporary and subject to change without notice
Glare cut 30°
Reflector: Plastic(Aluminum,Silver Specular Finish)
Trim: Aluminum Die-casting,White Matte Finish
Life time: 40000hr(L70)
2700K and 3500K type are available upon request
Dimming 10-100% with 0-10V dimmer
■Note
More than 230mm height is required when installing the fixture.